



1. Outdoor Unit

1-2. Dimensional Data U-8MZ1E8, U-10MZ1E8


unit: mm

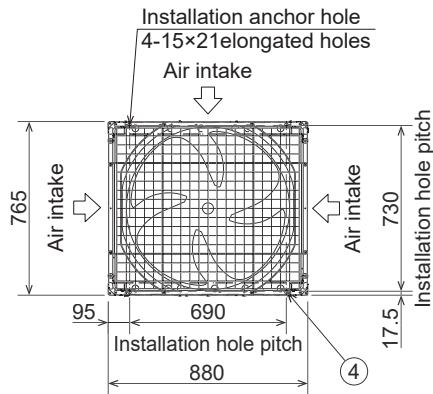


Top view




View Z

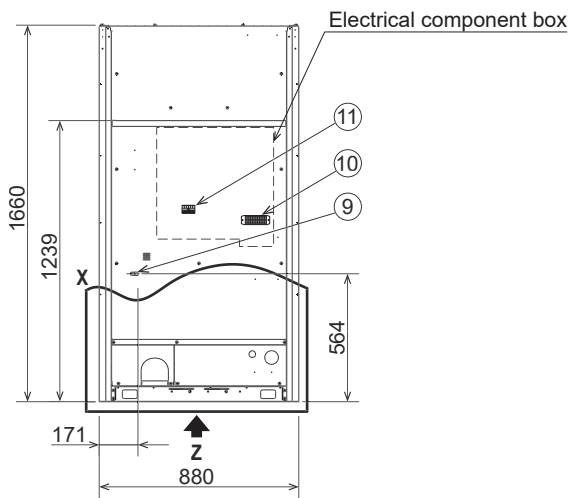

Front view

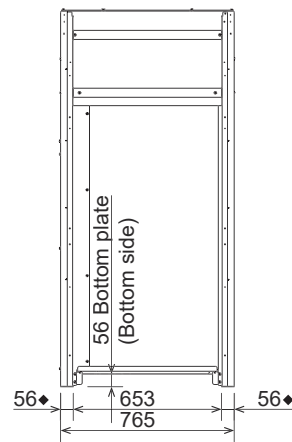


Side view

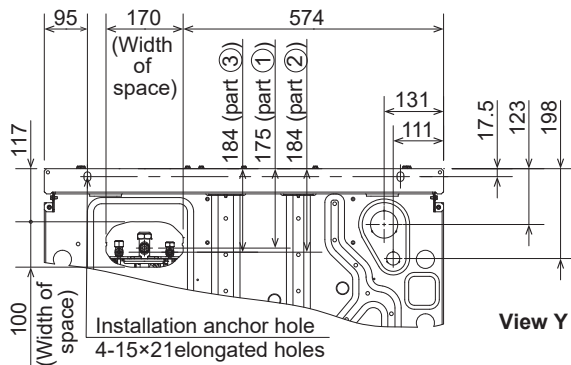♦: Installation fixing bracket
Installation side

View Y

Position of refrigerant tube connection

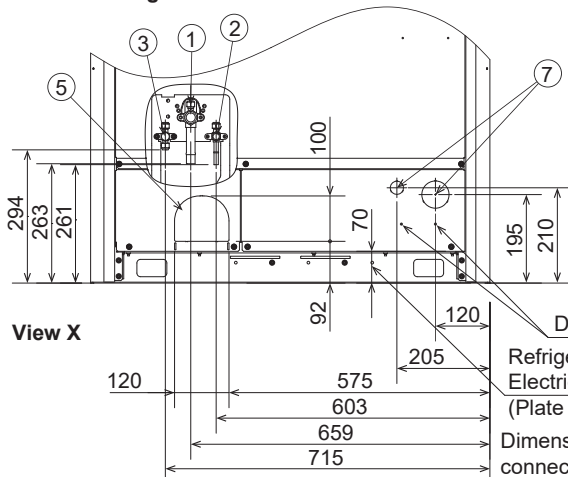

View X

Types of unit			8HP	10HP
①	Refrigerant tubing (gas tube)	brazed connection	ø19.05	ø19.05
②	Refrigerant tubing (liquid tube)	brazed connection	ø9.52	ø9.52
③	Refrigerant tubing (balance tube)	flared connection	ø6.35	ø6.35
④	Installation holes(4-15×21 elongated holes), anchor bolts M12 or larger			
⑤	Refrigerant tubing port (front: knock-out hole)			
⑥	Refrigerant tubing port (bottom: slit hole)			
⑦	Electrical wiring port (front: ø60, ø29 knock-out hole - for conduit connection)			
⑧	Electrical wiring port (bottom: ø60, ø29 knock-out hole - for conduit connection)			
⑨	Pressure outlet port (for high pressure: ø7.94 Schrader-type connection)			
⑩	Terminal plate			
⑪	Terminal plate for inter-unit control wiring and/or inter-outdoor unit control wiring			

